


ELECTRIC SAUNA OVEN

Typ 43.F/N

Outer casing in plain burnished high-alloyed steel or enamelled sheet steel in anthracite with pearl effect. Fire-aluminized sheet metal inner casing in "floating" design to avoid cracking noises. Galvanized sheet steel back panel and exterior connection, terminal box. Socket in suction area with integrated water drip tray. High-alloyed steel stone basket. Low surface stress on stainless and scaling free heating elements which are easily interchangeable.

Includes 15 kg unit of natural sauna stones. Wall-mounting kit for securing standing oven or wall-mounting oven included in delivery. Recommended for family saunas.

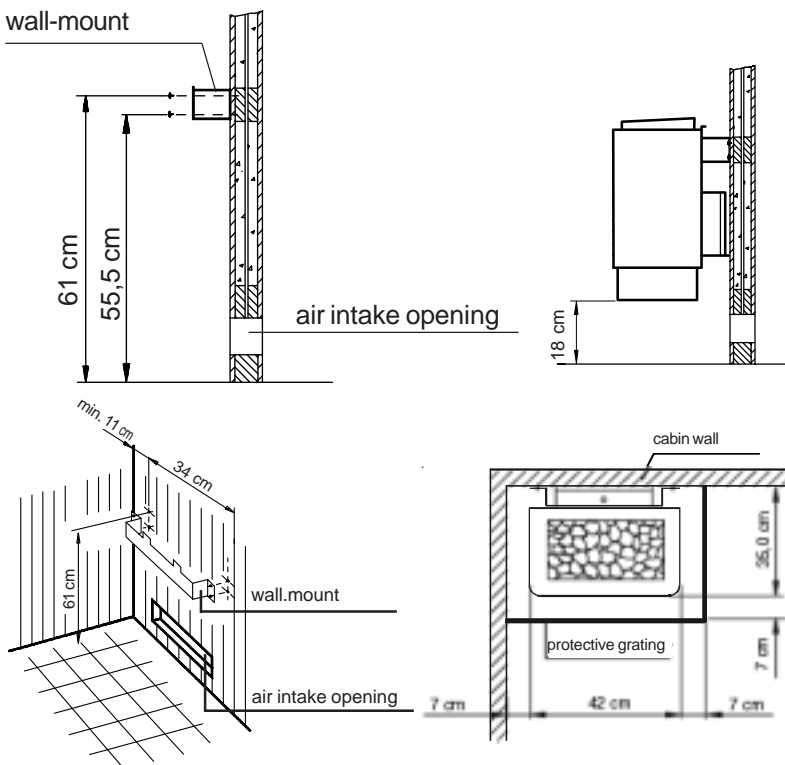

Technical data

voltage: 400V AC 3N 50 Hz
 power consumption: 4,5; 6,0; 7,5; 9,0 kW
 height: 710 mm, width: 420 mm, depth: 360 mm
 stone filling: 15 kg
 leakage current: max 0,75 mA per kW heat output
 Sauna oven for use in family sauna
 for operation with control units Econ A1/A2,
 EMOTEC B 6000/D 9000

capacity	oven installation dimensions in cm	suitable for cabin volumes	minimum ventilation size	weight (excl. stones or packing)	outer casing	Art.-Nr.
4,5 kW (3x1,5 kW)	71/42/36	4 - 6 m ³	je 105 cm ² *	15,0 kg	anthracite with pearl effect high-alloyed steel, plain	94.2233 94.2263
6,0 kW (3x2,0 kW)	71/42/36	6 - 8 m ³	je 140 cm ² *	15,0 kg	anthracite with pearl effect high-alloyed steel, plain	94.2234 94.2264
7,5 kW (3x2,5 kW)	71/42/36	7 - 10 m ³	je 175 cm ² *	15,0 kg	anthracite with pearl effect high-alloyed steel, plain	94.2235 94.2265
9,0 kW (6x1,5 kW)	71/42/36	9 - 14 m ³	je 210 cm ² *	16,0 kg	anthracite with pearl effect high-alloyed steel, plain	94.2236 94.2266

*or according to cabin producer's specification

Subject to technical modifications